



模组规格	伺服		丝杠		最大速度		最大负载(水平)	最大负载(垂直)	重复定位精度	行程	
	W	外径d	导程l	(mm/s)	(KG)	(KG)	(mm)	最小行程		最大行程	
MSY	94	200	12	5	L	250	25	13	±0.02	100	800
		200	12	10	N	500	16	8	±0.02	100	800
		400	12	5	L	250	50	24	±0.02	100	800
		400	12	10	N	500	25	14	±0.02	100	800
	150	400	20	5	L	250	160	50	±0.02	100	1600
		400	20	10	N	500	50	25	±0.02	100	1600
		400	20	20	H	1000	18	9	±0.02	100	1600
		750	20	20	H	1000	44	24	±0.02	100	1600
		750	25	5	L	250	225	87	±0.02	100	1600
	200	750	25	10	N	500	88	38	±0.02	100	2000
		750	25	25	H	1250	18	10	±0.02	100	2000
		750	32	5	L	250	168	49	±0.02	100	2000
		750	32	10	N	500	65	22	±0.02	100	2600
		750	32	20	H	1000	22	9	±0.02	100	2600
		1000	32	5	L	250	380	100	±0.02	100	2600
	1000	32	10	N	500	152	52	±0.02	100	2600	
	1000	32	20	H	1000	53	22	±0.02	100	2600	

备注：L-低速250mm/s；N-中速500mm/s；H-高速1000mm/s

MSY94

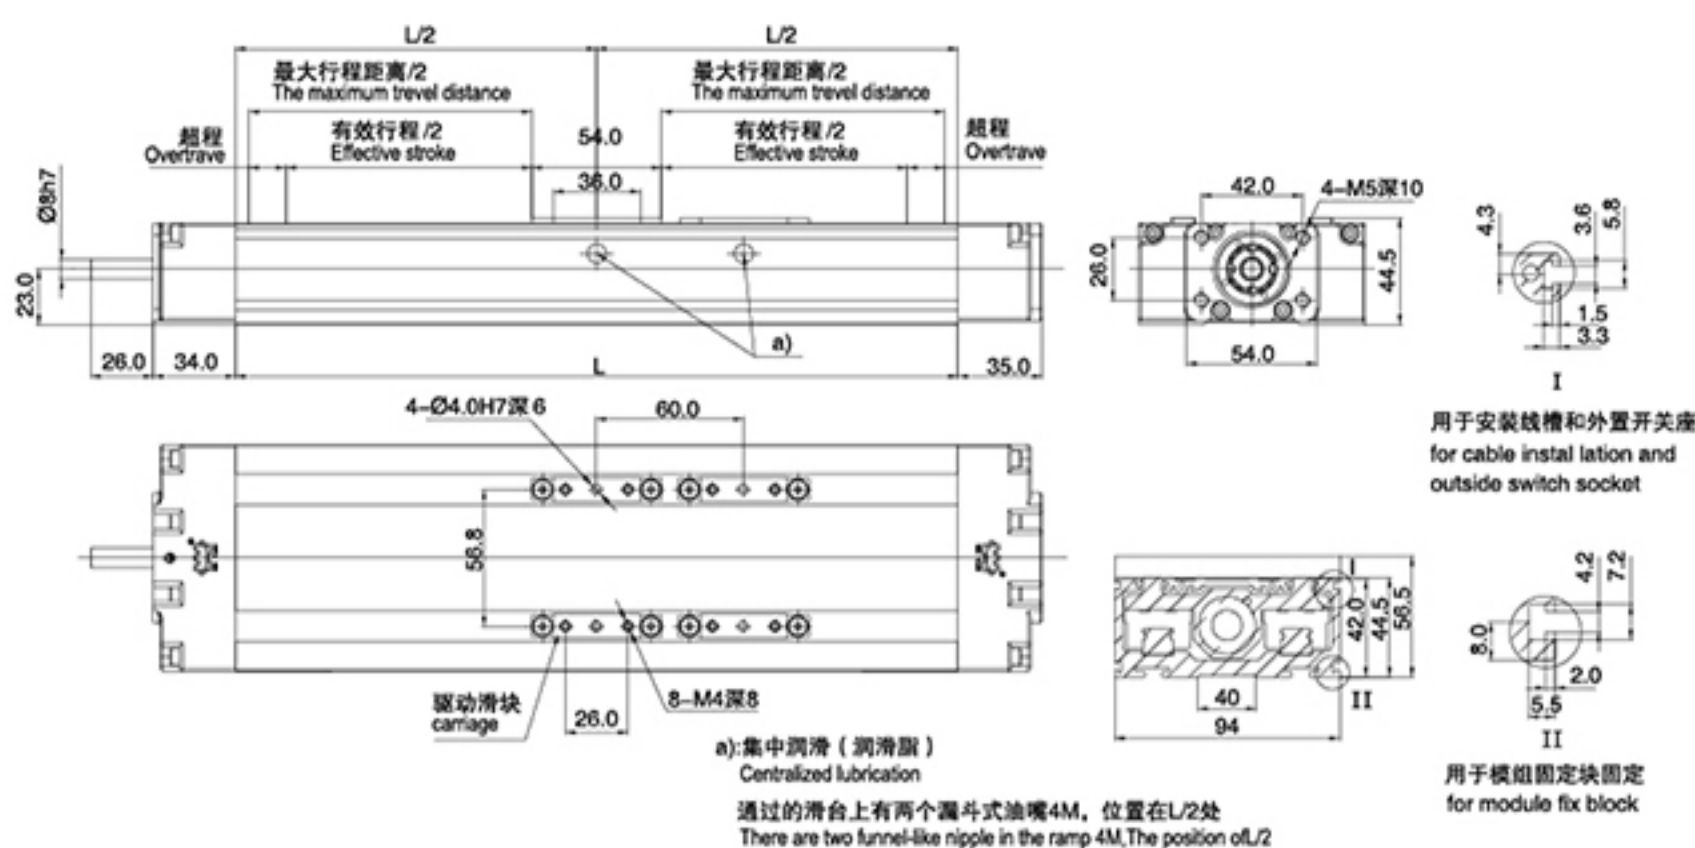

MSY150

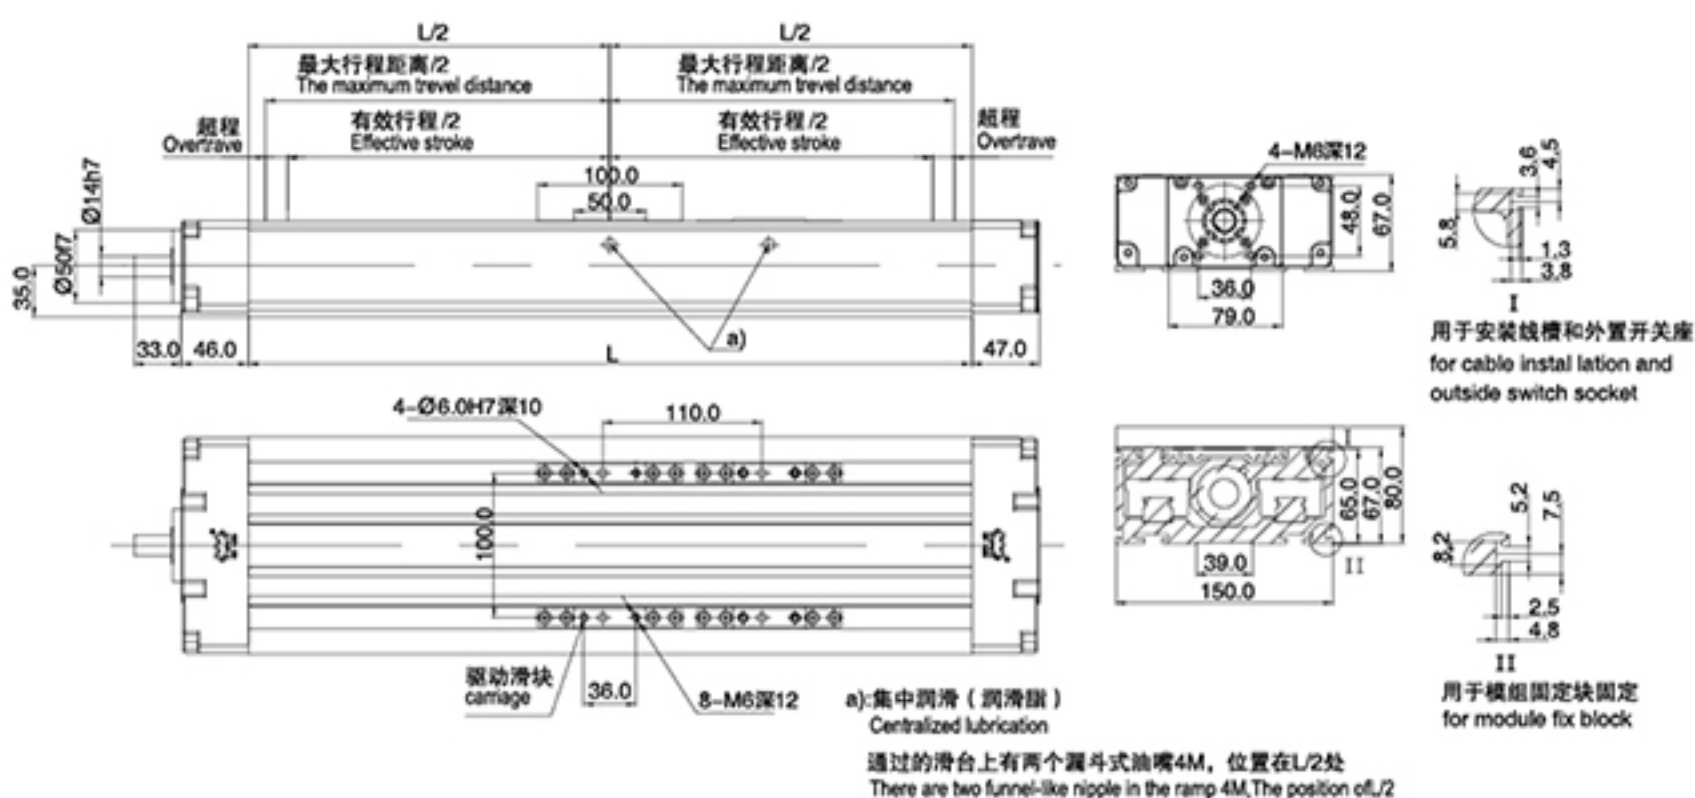

MSY200

